


## ShieldGLAND Standard M20S

ShieldGLAND Standard M20S Brass locknut, Earth tag

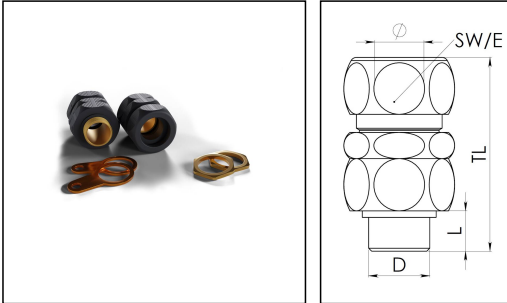

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

<b>Material sealing gasket</b>	TPE
<b>Temp. range min</b>	-40 °C
<b>Temp. range max</b>	120 °C
<b>Protection class</b>	IP68 (5 bar 30 min)
<b>Thread type</b>	M
<b>Ø Connection thread D</b>	20
<b>Lead</b>	1,5
<b>Length screw-in thread L</b>	11 mm
<b>Ø cable diameter min</b>	7 mm
<b>Ø cable diameter max</b>	16 mm
<b>Ø cable below cable shield max</b>	7 mm - 11 mm
<b>Key width SW</b>	27 mm
<b>Collar diameter (E)</b>	30 mm
<b>Total length TL</b>	57 mm - 63 mm
<b>Type</b>	ShieldGLAND Standard M20S
<b>WISKA-Order no.</b>	10112390
<b>Packing unit</b>	2

Remarks:

Complete with Brass locknut and earth tag

LSF = Low smoke and fume

LSOH = Low smoke zero halogen

